




1.0 Software installation



- 1.1 Load ATX-01 Programmer Installer "setup.exe" to desired computer/laptop.
- 1.2 Chose "Installation Folder" then select "next".
- 1.3 After installation is complete, select "next" to close installer.

2.0 Hardware Requirement.


2.1 Tx (ATX-01)	2.2 USB cable, A to B	2.3 Computer/Laptop
		

3.0 Programming Instruction.

- 3.1 Plug USB cable between ATX-01 and computer.
- 3.2 Plug ATX-01's 5V DC power adapter and turn power on.
- 3.3 Open ATX-01 program desktop shortcut

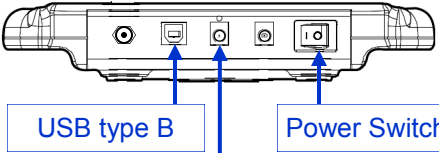3.1 & 3.2 USB cable & Power Adapter	3.3 ATX-01 desktop shortcut
 <p>USB type B</p> <p>Power Adapter</p> <p>Power Switch</p>	

3.4 ATX-01 Programming Software, select COM port.

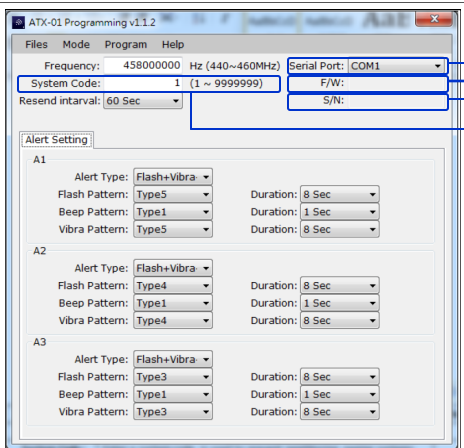


- COM port
- Firmware
- Serial Number
- System Code

4 Type of Alerts for A1, A2 & A3

1. Flash
2. Flash+Vibra (at the same time)
3. Flash+Beep (at the same time)
4. Flash+Vibra+Beep (at the same time)


3.5. To read device, see "Program" tab.

- 3.5.1. Read (F3)
- 3.5.2. Write (F4)

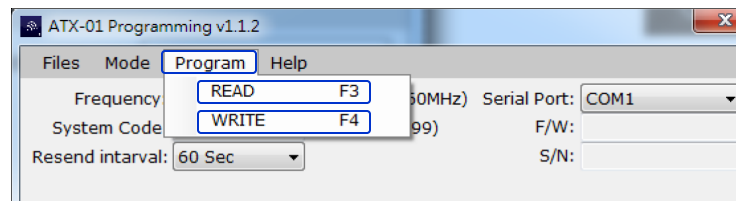


1. **Read:** Read the parameter from device. → **Read OK**
2. **Write:** write the parameter to a device. → **Write OK**


3.6. Others

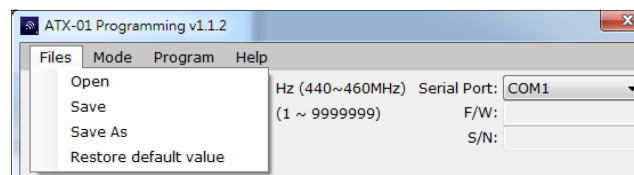

1. **Open:** open a pre-saved file.
2. **Save:** save file.
3. **Save as:** save the parameter to a new or another file.
4. **Restore default value:** recover the factory setting parameters.

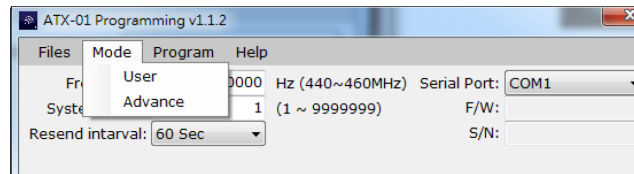

1. **User:** user mode.
2. **Advance:** factory setting mode.

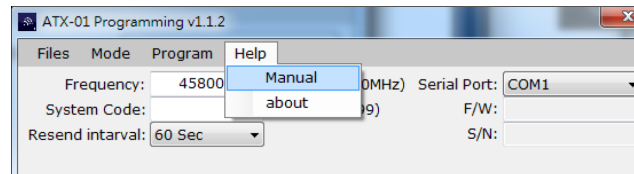

1. **Manual:** the programming user guide.

Digital Paging Company 818-508-5700	Document	Name	Engineering Official Release			
		Title	Tx (ATX-01) Programming			
		No.	EOR-ATX01-011			
		Page	1 of 1	Date	08.25.15	Rev.
PREPARED BY: F. CRISOSTOMO		APPROVED BY: SABOUHI		APPROVED BY: SABOUHI		